


6LR61AD POWERLINE

DIMENSIONS (MM)



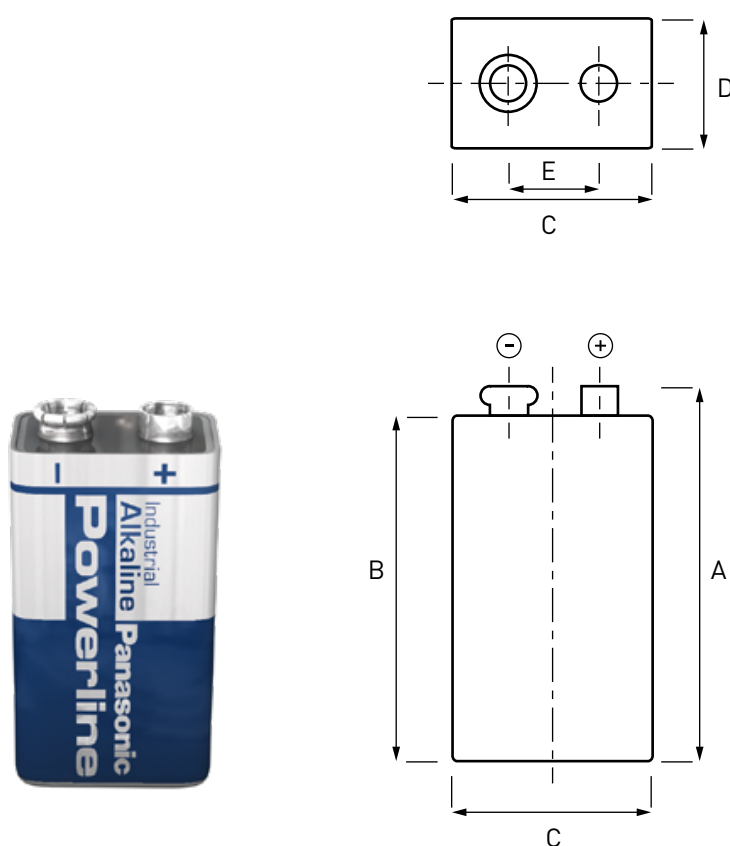


IEC dimensions	Maximum	Minimum
A	48.5	46.5
B	46.4	
C	26.5	24.5
D	17.5	15.5
E	12.95	12.45

Specifications	9V / 6LR61 / 6AM6 / MN1604 / 1604A / 1604AC
Made in	Belgium
Type	Alkaline Foil
Nominal voltage (V)	9.0
Electrolyte	Potassium Hydroxide
Average weight (g)	43.0
Storage temp. range	+10°C [50°F] ~ +25°C [77°F]
Operating temp. range	-20°C [-4°F] ~ +55°C [131°F]
Average Impedance	+/- 2,3Ω @ 1kHz fresh
Heavy metals	No added Mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC Nordic Ecolabel
Recommended cut off voltage	5.4V per battery

6LR61AD POWERLINE

TYPICAL DISCHARGE VALUES

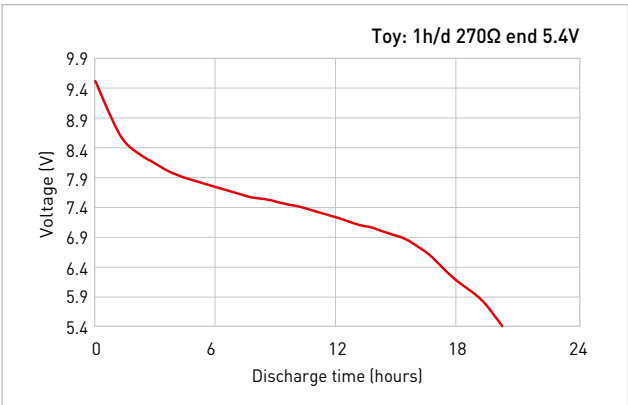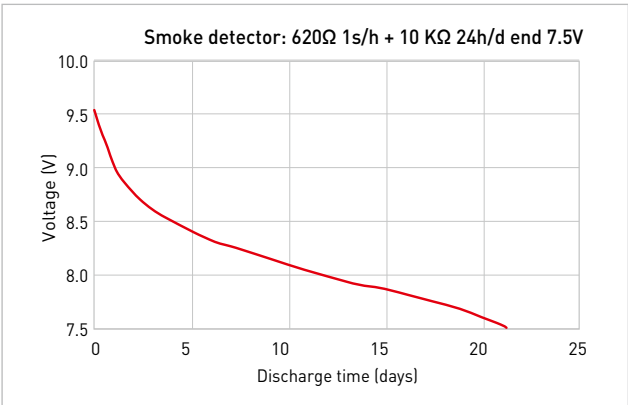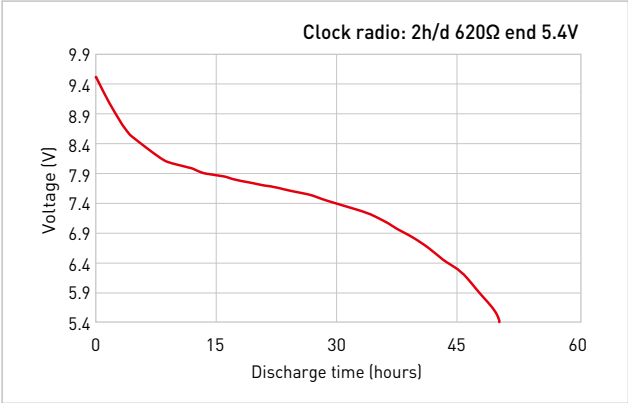

DISCHARGE TEMPERATURE CHARACTERISTICS

